


**Heavy duty motor.**

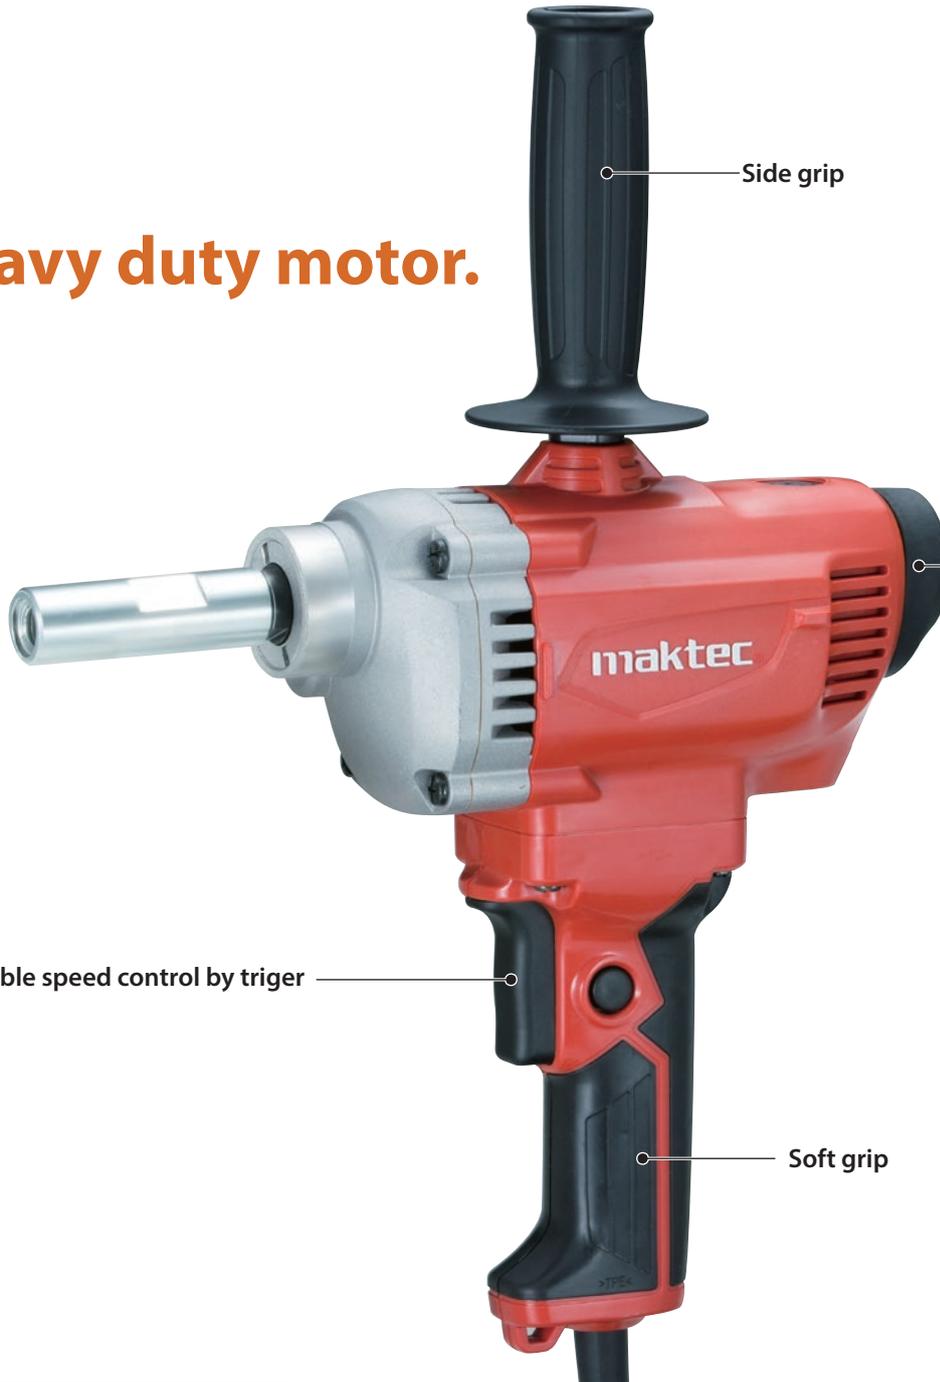

Side grip

Optional D-handle  
can be attached.

For some countries, this D-handle  
is supplied as a standard accessory.



Variable speed control by trigger

Soft grip



- Double Insulation
- Variable Speed

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Continuous rating Input           | 800W                              |
| No load speed (rpm)               | 0-700                             |
| Shank size of tool holder portion | M12 or M14                        |
| Dimensions (L x W x H)            | 280x86x388mm (11"x3-3/8"x15-1/4") |
| Net weight                        | 3.4kg (7.4lbs)                    |
| Power supply cord                 | 2.0m (6.6ft)                      |



**Standard Equipment :**  
Side Grip (Tool does not come with Shaft and Mixing Blade .)

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan